



Peve Enterprises Limited
 Tel : 0044 (0)1473 736399
 Fax : 0044 (0)1473 736406
 E-mail : sales@pevexenterprises.co.uk
 www.pevexenterprises.co.uk
 www.woodstoves.co.uk

Colour Options



Enamelled Blue



Enamelled Cream



Enamelled Green

All the stoves in the Suffolk range are available in five stove enamelled colours as shown. Call our office or email us for availability, prices and further information. Stove enamelling is available 4/5 weeks from placement of order.



Enamelled Black



Enamelled Red

Design and artwork by TPW T: (01206) 395888



The Suffolk
 Multi Fuel Stove Range
 Traditionally styled cast iron stoves

Authorised Distributor


A World of Stoves, a World of Choice

The Suffolk range, first introduced in 2003, has since built an enviable reputation for reliability and great value. Traditional styling combined with high combustion efficiency ensures that Suffolk multi-fuel stoves can offer a viable alternative heat source in an age of rapidly increasing energy costs.

With heat outputs ranging from 5kW to 16kW, single and two door options, multi-fuel grates as standard and the flexibility to install with top or back flue outlets, the Suffolk range caters for virtually every installation requirement.

All Suffolk stoves come with an **Airwash** system as standard and comply with European Standard EN13240 and include approval for installation on 12mm deep hearths.

These robustly built cast iron stoves represent excellent value, will give years of trouble free operation and are simple and safe to operate. All stoves are provided with the necessary operating tools, user instructions and heat proof mitten.

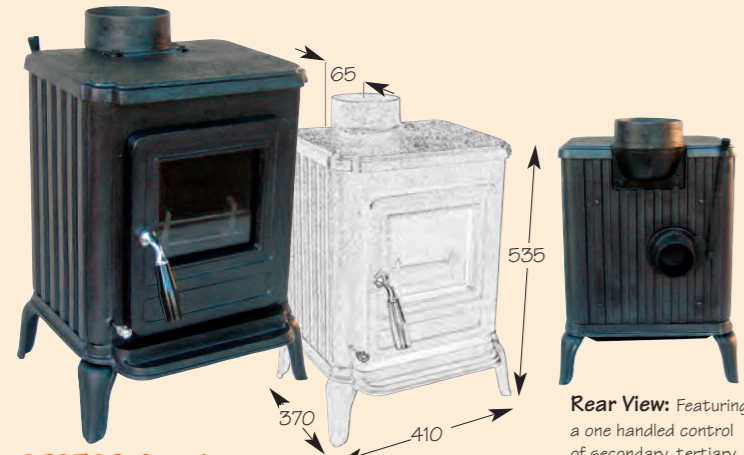


ST0709 Capel
Output: 5kW
Weight: 67kG
Airwash & tertiary air systems
Flue dia: 127mm
Height to centre of rear flue outlet: 525mm


Rear View: Featuring a one handed control of secondary, tertiary and primary air. Can be connected to a direct air supply.



ST0311B Orford
Output: 5-6kW
Weight: 63kG
Flue dia: 127mm
Height to centre of rear flue outlet: 406mm

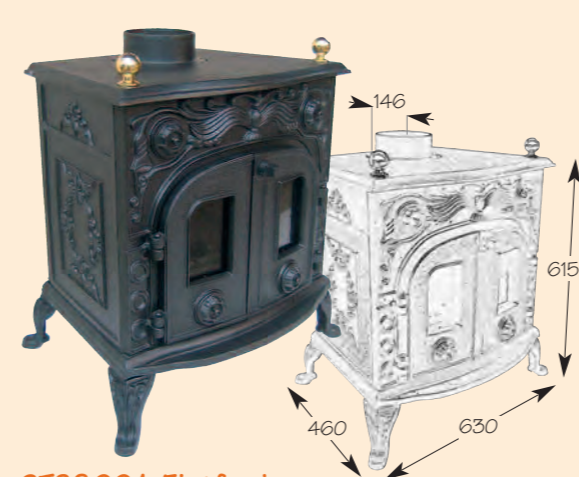

ST2800A Flatford
Output: 6-8kW
Weight: 96kG
Flue dia: 127mm
Height to centre of rear flue outlet: 477mm

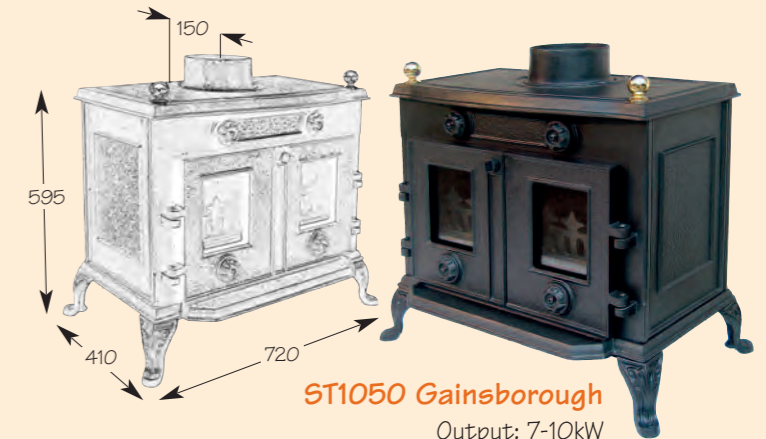


ST1050 Gainsborough
Output: 7-10kW
Weight: 110kG
Flue dia: 152mm
Height to centre of rear flue outlet: 470mm




ST0147A Constable
Output: 6-7kW
Weight: 88kG
Flue dia: 127mm
Height to centre of rear flue outlet: 432mm




ST0147B Constable
Output: 6-7kW
Weight: 88kG
Flue dia: 127mm
Height to centre of rear flue outlet: 432mm

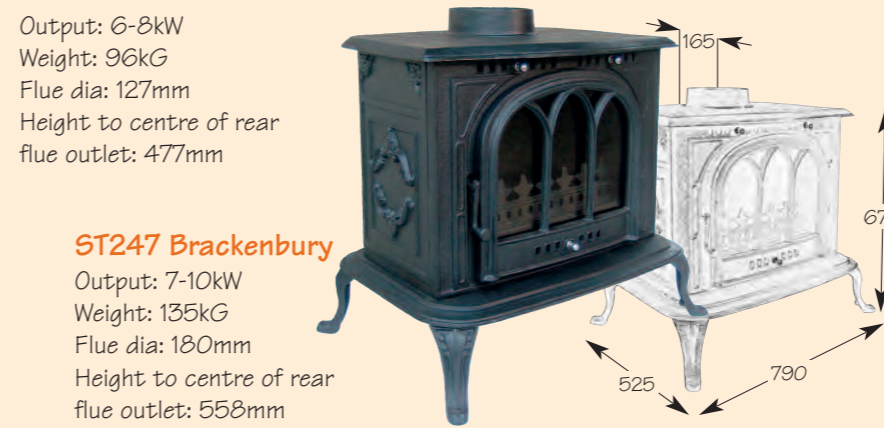


ST247 Brackenburg
Output: 7-10kW
Weight: 135kG
Flue dia: 180mm
Height to centre of rear flue outlet: 558mm

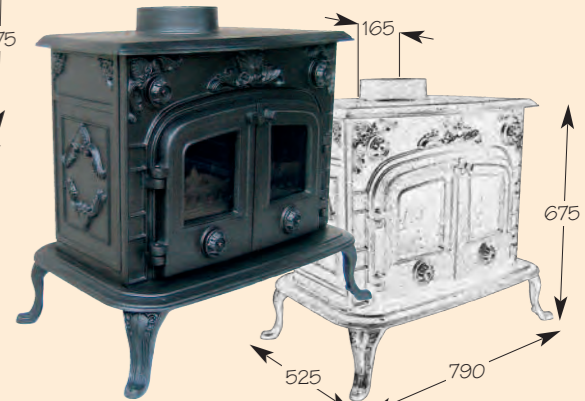

ST1021sc Waverley
Output: 7-14kW
Weight: 131kG
Flue dia: 180mm
Height to centre of rear flue outlet: 558mm

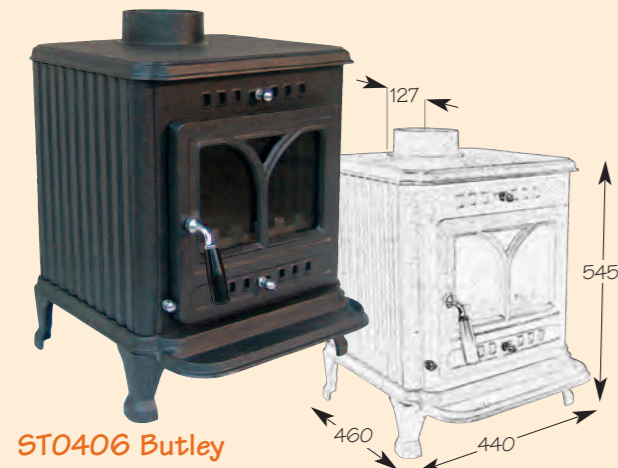

ST0406 Butley
Output: 6-7kW
Weight: 70kG
Flue dia: 127mm
Height to centre of rear flue outlet: 425mm

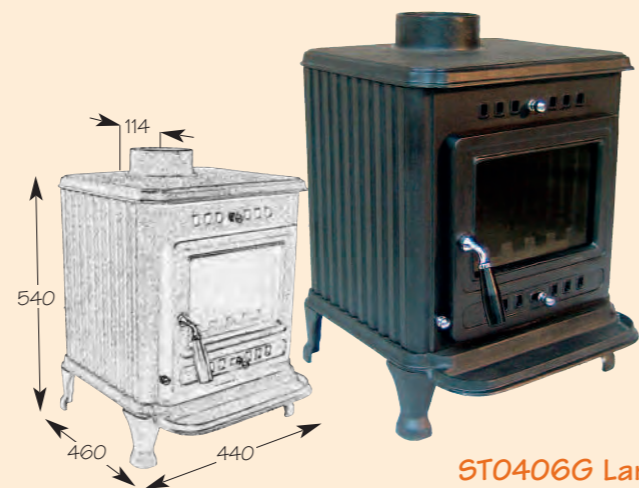


ST0406G Lark
Output: 6-7kW
Weight: 70kG
Flue dia: 127mm
Height to centre of rear flue outlet: 425mm




ST246A Wolsey
Output: 7-10kW
Weight: 120G
Flue dia: 155mm
Height to centre of rear flue outlet: 580mm

Featuring a one handed control of secondary, tertiary and primary air. Can be connected to a direct air supply.

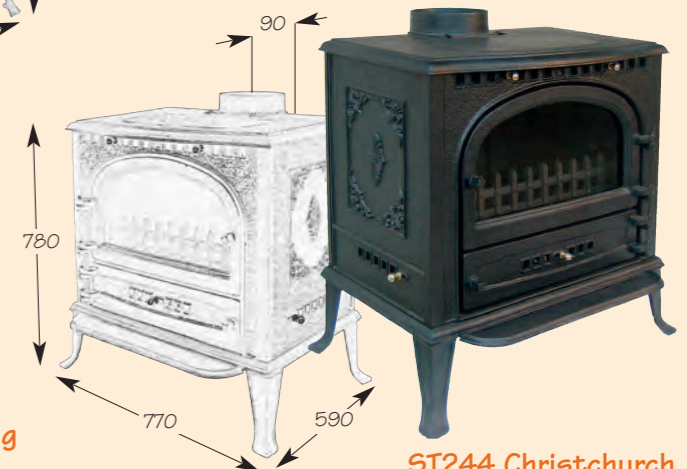

ST244 Christchurch
Output: 7-16kW
Weight: 165kG
Flue dia: 180mm
Height to centre of rear flue outlet: 775mm

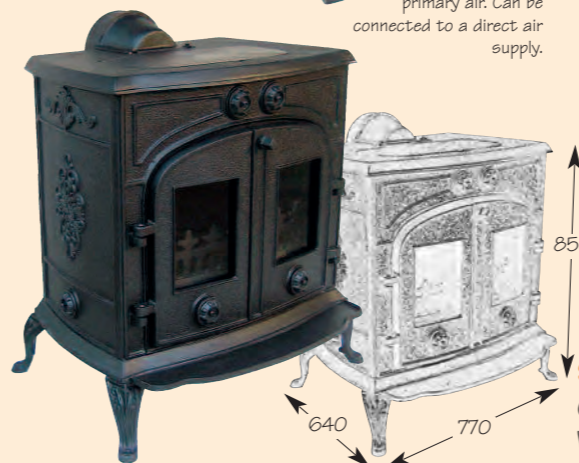

ST1017A Gipping
Output: 8-16kW
Weight: 147kG
Flue dia: 180mm
Height to centre of rear flue outlet: 750mm
Distance from rear of stove to centre of top flue: 90mm

All dimensions in mm. Stove outputs and dimensions are approximate. Specifications are subject to change without prior notice.